



TRI TOOL INC.

TRI TOOL INTERNATIONAL INC.

3806 Security Park Dr., Rancho Cordova, CA 95742-6990 U.S.A. 916-351-0144 800-345-5015 Fax 916-351-0372 ttcustserv@aol.com www.tritool.com

TRI TOOL INC. TECHNICAL SPECIFICATION MODEL 601SBM LOW PROFILE CLAMSHELL APRIL, 2000

MODEL 601SBM Low Profile Clamshell

Description: The 601SBM Low Profile Clamshell is a split-frame pipe lathe for severing and beveling in-line pipe with a range of 1/4" through 1" pipe with minimal radial and axial clearances.

Design and Operating Features

1. Easily adjustable precision bearing surfaces preload and stabilize the rotating head to provide long life, low maintenance, stability and precision.
2. The Clamshell splits into two halves for mounting on closed loop systems. All parts are secured to the two halves to avoid loss of parts and provide maximum ease of handling.
3. The machine may be equipped with self-centering mounting pads for quick, easy mounting or may be equipped with adjustable mounting pads for out-of-round pipe conditions.
4. Dual tool modules with auto-feed sprockets and adjustable slide ways provide maximum maintainability, life and operator safety with minimum operator training.
5. The auto-feed star sprockets provide .003" (.08mm) of radial feed per revolution for a controlled depth of cut.
6. Drive gears and bearing surfaces are covered for operator safety and sealed to prevent cutting chip damage.
7. Operator controls are away from the rotating headstock for safety.
8. Modular design concepts provide quick, easy maintenance and maximum versatility in drive and tooling options.
9. Detachable right angle air motor provides maximum handling ease and low axial clearance. Torque accepting mounting bracket allows the air motor to be rotated in various positions.

Specifications:

1. Reference attached Envelope Drawing No. 77-0394.

	<u>Low Profile Tool Module</u>	<u>Standard Tool Module</u>
2. Cutting capacities* on 1/4" through 1" pipe.* (Note: Capacity exceeds maximum wall thickness for small pipe sizes)		
a. Severing with standard procedures	0.38" wall (9.7 mm)	0.63" wall (16.0 mm)
b. Severing with special procedures	N/A ---	1.00" wall (25.4 mm)
c. Severing and single beveling	0.45" wall (11.4 mm)	0.45" wall (11.4 mm)
d. Severing and double beveling	0.24" wall (6.1 mm)	0.40" wall (10.2 mm)

*Materials include, but are not limited to: carbon steel, low alloy steel, chrome steel (20% max), chrome/molly alloys (Rc 32 max), austenitic stainless steel, inconel, copper, aluminum, and copper nickel alloys.

3. Clearances:

a. Rotating parts diameter	5.50" (139.7mm)	5.31" (134.9mm)
b. Main frame diameter	5.31" (134.9mm)	5.31" (134.9mm)
c. Axial clearance required relative to centerline of cut:		
Mounting side	2.51" (63.8mm)	3.50" (88.9mm)
Side opposite of frame	0.63" (16.0mm)	0.62" (15.7mm)
d. Radial clearance over pipe:		
1" pipe	2.10" (53.3mm)	2.00" (50.8mm)
3/4" pipe	2.22" (56.4mm)	2.13" (54.1mm)

1/2" pipe	2.33" (59.2mm)	2.24" (56.9mm)
3/8" pipe	2.41" (61.2mm)	2.32" (58.9mm)
1/4" pipe	2.48" (63.0mm)	2.39" (60.7mm)

4. Drive Options:

- a. Right angle air motor

Air requirements @ 90 PSI	55 CFM
Horsepower	1.5 H.P.
Head speed @ max. H.P.	49 RPM

- b. In-line hydraulic motor (NOT AVAILABLE)

5. Tool Modules: Low Profile Standard

- | | | |
|---------------------------|--------------------|--------------------|
| a. Working diameter range | 0 – 1.31" (33.3mm) | 0 – 1.31" (33.3mm) |
| b. Travel per side | 0.50" (12.7mm) | 0.63" (16.00mm) |

6. Clamping:

- a. Fixed, self centering pad sets.
All sizes within the specified size range are available upon request.
- b. Adjustable pads only, available on request.

7. Weight:

Basic machine	8.5 lbs. (3.86 kg)
Right angle drive	12.0 lbs. (5.44 kg)
Low profile tool module set	1.3 lbs/module (0.59 kg)
Standard tool module set	1.7 lbs/module (0.77 kg)
Stand for bench operation	2.3 lbs. (1.04 kg)

Optional Accessories:

- a. Socket Weld Removal Tool Module Kit
- b. Counterbore Module Kit
- c. Lathe Stand Kit

Spare parts and standard tool bits are available from stock.


Engineering design services for custom tool bits and special function modifications are available from the factory.

All Tri Tool and allied equipment products are subject to design improvements and specification changes at any time with no obligation to units already sold.

Warranty (limited), parts and/or equipment are warranted against defects in material and workmanship for a period of one year from date of purchase. Full details supplied on request and/or with tools.

Filter, regulator, lubricator required to protect warranty on air powered tools.


REVISIONS		
REV	DESCRIPTION	DATE
C	UPDATED & REVISED	9-9-87

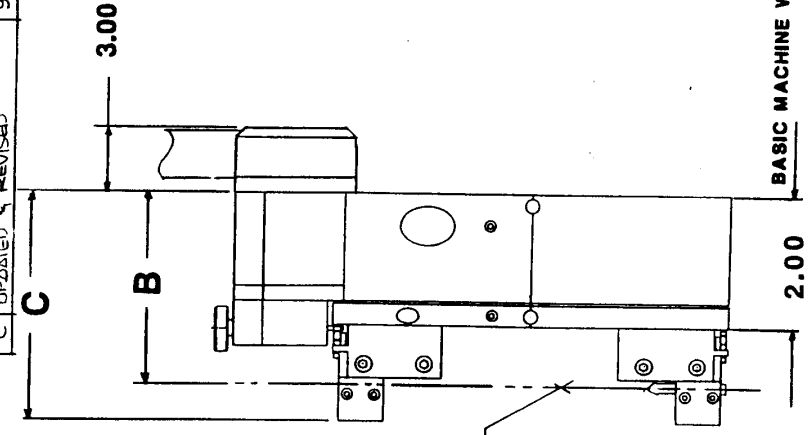

RIGHT ANGLE PNEUMATIC DRIVE OPTION

21.80 RAD

5.75 MAX HEIGHT

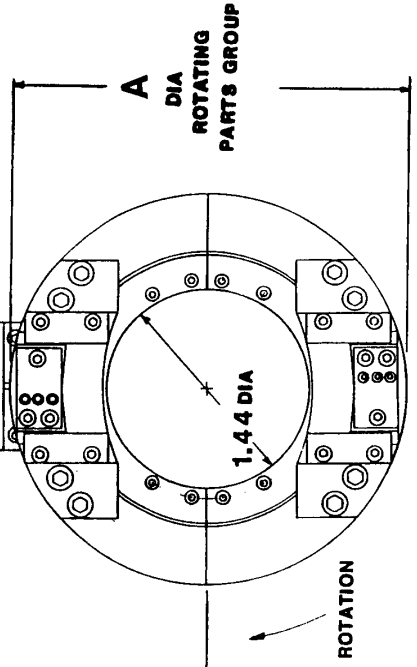

DIM	LOW PROFILE TOOL MODULE	STANDARD TOOL MODULE
A	5.50 DIA	5.31 DIA
B	2.51	3.50
C	3.14	4.12

QTY. REQ'D	FACH. NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
UNLESS OTHERWISE SPECIFIED		CONTRACT NO.		
FRANCHISES ARE:	FRACTIONS	DECIMALS	ANGLES	
1/2" =	1/16" =	1/16" =	1/16" =	
MATERIAL		APPROVALS	DATE	
FINISH		DRAWN	1/14/87	
USED ON		CHECKED	8/0	
APPLICATION		ISSUED		
DO NOT SCALE DRAWING		SCALE NONE		



ENVELOPE DRAWING 601 SBM

DWG. NO.	77-0394
SIZE	B
FSCM NO.	
REV.	C
SHEET	1 OF 1